
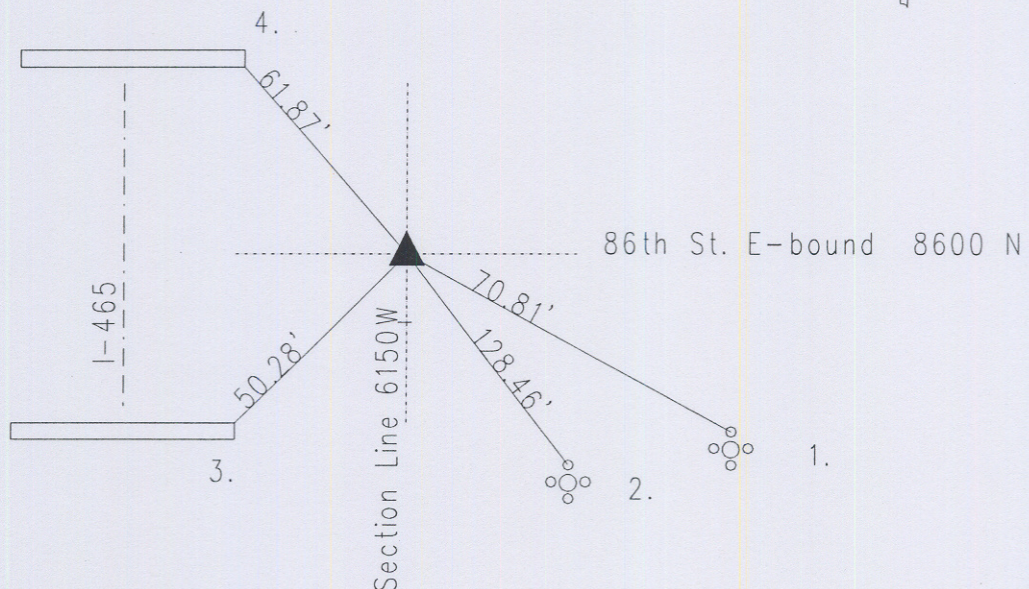


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 23 TOWNSHIP 17 RANGE 2
DATE: 7-13-07
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-29-01
EDM
IN. S.P.C. E ZONE NAD '83
NAME: 17022302
N: 517748.3625(m)
E: 48474.7157(m)

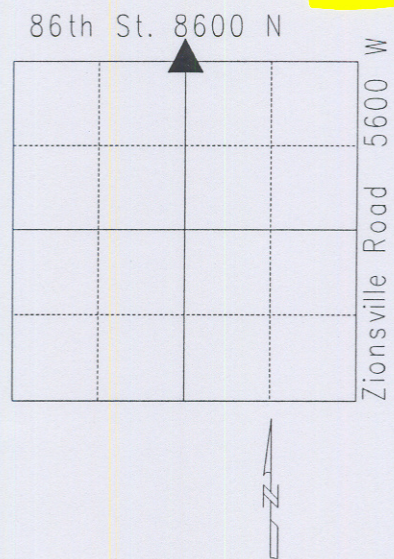

Original post set 1821 by laughlin with witness: 12" beech N 68 W 28 links; 10" dogwood S 36 E 10 links per Marion County Atlas pg. 4. Hosbrook 8-5-1851 called rock set with witness: 22" walnut N 10 E 61 links, 40" oak S 62 E 78 links per Pike Township Legal Survey Book pg. 19. MCSO (unknown date) called stone. GWS 1-27-64 called brass plug. Miller 4-11-75 called same. Greene 8-2-88 called same. Wilcoxen 10-10-94 called same. Wilcoxen excavated 11-15-94 Harrison set over brass plug in concrete. Re-tied by Wilcoxen 7-29-01. Re-tied by Wilcoxen 7-10-07 per new construction.

17022302

REF.	DISTANCE	DESCRIPTION
1.	70.81'	Cut 'x' N bolt of steel pole #479/194B
2.	128.46'	Cut 'x' most northerly bolt of steel pole
3.	9.08'	Back of curb
4.	50.28'	NF corner of bridge
5.	61.87'	SF corner of bridge